

► Bicycle Stands

SI


Design:
Creo Architects A/S





Technical drawings

- part of **NRG** Group

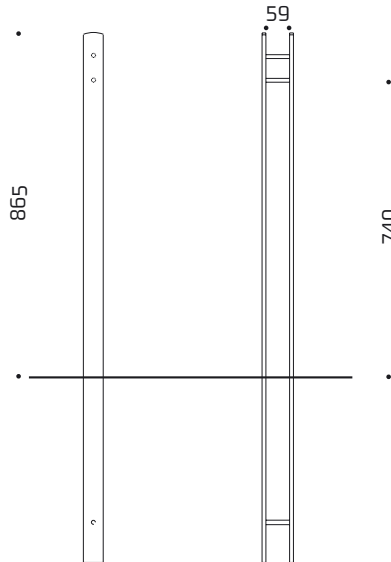

Dimensions

Uprights 50 x 10 mm

Cross ties Ø 10 mm

Materials and Finish

Steel Hot-dip galvanised. Can also be powder coated. Mechanical forces may cause the powder coating to peel. For standard RAL colours, see product info. Also available in glass-blasted stainless steel.

Recommended min. spacing

Single-sided rack: 50 cm.
Double-sided rack: 25 cm.

Product

Description

SI 59 Cycle stand, for embedment

SI 59 Cycle stand, with base plate for surface mounting

For more information please visit www.veksa.com